


# Zigbee Blinds Actuator Mini

Item number 57008000

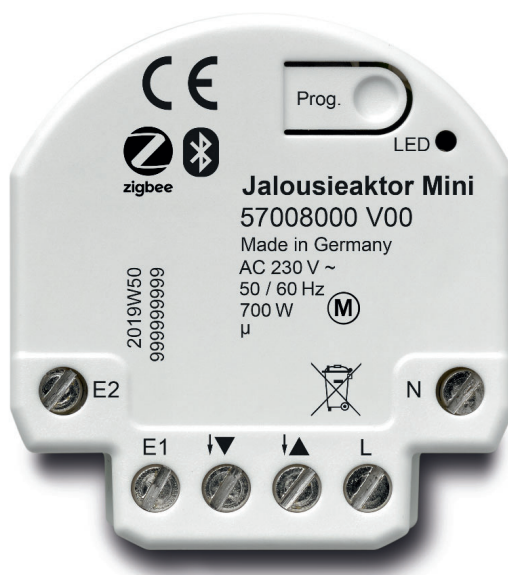

Blinds actuator for control of electrical blinds, shutters or awning in a Zigbee 3.0 system. The device provides two inputs for connecting blind switches or -push-buttons. The installation takes place in the appliance box behind the switch/push-button or in the shutter housing next to the motor. Configuration and immediate function test via the Prog. button.

## Product features

- › Zigbee Actuator to integrate with all Zigbee systems with Zigbee 3.0 Standard
- › Parameterisation via NEXENTRO config App
- › Updateable via NEXENTRO config App
- › 2 inputs for blinds or roller shutter control keys
- › 2 outputs for the control of electric blinds and shutters
- › Installation in appliance boxes behind blind or roller shutter control keys, appliance box with an installation depth of 60 mm recommended
- › Screw terminal for the through-wiring of existing conductors (max. 16 A)
- › Button and LED for commissioning and functionality tests



## Technical data

<b>Mains voltage</b>	AC 230 / 240 V ~
<b>Mains frequency</b>	50 / 60 Hz
<b>Connected load Motors</b>	700 W
<b>Standby Power consumption</b>	max. 0.2 W
<b>Running time</b>	1 ... 120 s
<b>Cable length Inputs</b>	max. 3 m
<b>Ambient temperature</b>	-5 ... +45 °C
<b>Storage/ transport temperature</b>	-25 ... +70 °C
<b>Dimensions (LxWxH)</b>	approx. 48 x 51 x 20 mm

<b>Zigbee</b>	
<b>Communication protocol</b>	Zigbee 3.0 (Router)
<b>Radio frequency</b>	2.400 ... 2.483 GHz
<b>Transmission capacity</b>	1 mW

<b>Bluetooth</b>	
<b>Radio frequency</b>	2.400 ... 2.480 GHz
<b>Transmission capacity</b>	max. 2 mW, Class 2
<b>Transmitting range</b>	typ. 10 m