


# Operating devices & accessories

## Operating device for Low Power modules

### Within the profile.

Placement within the mounting profiles with through wiring.




Overall size (mm)			Rated voltage, AC (V)	max. network power (W)	LI min	LI max	Interface	Secondary	Protection class	Article number
L	W	H								
800	38	32	220-240	67	0	105	-	24 V DC	I	il 4033_CV_60

## Operating devices for Low Power modules


### Outside the profile.

Placement outside the mounting profiles with strain relief.



Overall size (mm)			Rated voltage, AC (V)	max. network power (W)	LI min	LI max	Interface	Secondary	Protection class	Article number
L	W	H								
271	35	23	220-240	67	0	105	-	24 V DC	II	il 4033_CV_60_E
338	35	25	220-240	110	0	177	-	24 V DC	II	il 4033_CV_100_E

## Secondary cable routing for Low Power modules





Article description	Article number	Article description	Article number
Extension cable, 0.5 m	il_ZLE_IP20_001	Shunt A	il_ZL_IP20_002
Extension cable, 1 m	il_ZLE_IP20_002	Shunt M	il_ZL_IP20_003
Extension cable, 2 m	il_ZLE_IP20_005		
Cable bracket (10 units)	il 4033 ZM K 001		

## Operating devices for Mid Power Linear and High Power modules

### Within the profile.

Placement within the mounting profiles with through wiring.






Overall size (mm)			Rated voltage, AC (V)	Max. network power (W)	LI min	LI max	Interface	Secondary	Protection class	Article number
L	W	H								
800	38	32	220–240	55	22	90	-	900 mA	I	il 4033_CC_50
800	38	32	220–240	56	22	90	DALI	900 mA	I	il 4033_CC_50_DA
800	38	32	220–240	104	22	2 x 86	2 x DALI	900 mA	I	il 4033_CC_100_2DA
800	38	32	220–240	104	22	173	2 x DALI	900 mA	I	 il 4033_CC_100_DA_TW

## Operating devices for Mid Power Linear and High Power modules



### Outside the profile.

Placement outside the mounting profiles with strain relief.



Overall size (mm)			Rated voltage, AC (V)	Max. network power (W)	LI min	LI max	Interface	Secondary	Protection class	Article number
L	W	H								
153	76	30	120–250	64	4	90	DALI	900 mA	I	il 4033_CC_50_DA_E
385	85	40	120–250	128	4	2 x 90	2 x DALI	900 mA	I	il 4033_CC_100_2DA_E
385	85	40	120–250	128	8	180	2 x DALI	900 mA	I	 il 4033_CC_100_DA_TW_E

## Secondary cable routing for Mid Power Linear and High Power modules

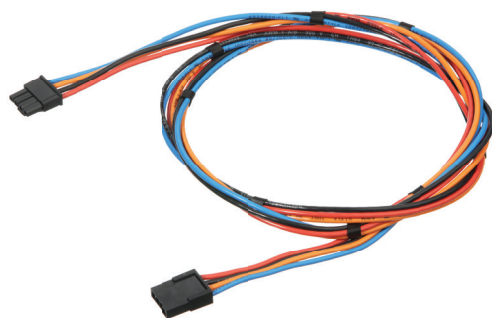

Article description	Article number	Article description	Article number
Extension cable, 0.5 m	il 4033_VL_4P_M_5	Short-circuit connector	il 4033_KSS
Extension cable, 1 m	il 4033_VL_4P_M_10		
Extension cable, 2 m	il 4033_VL_4P_M_20		
Cable bracket (10 units)	il 4033_ZM_K_001		